



# HOSHIZAKI




## KM-35A CRESCENT ICE MAKER




### Product Description

The KM-35A is a compact self-contained ice maker which produces clear, crescent shaped ice.


- Individual premium crescent cube with no ice bridging.
- Exceptionally hard crystal clear cubes that melt slowly.
- CycleSaver® design allows KM machines to produce more ice, using less energy, while cycling 1/2 as many times as the competition.
- EverCheck™ Control Board with audible alarm and diagnostic features, designed to assist service support in diagnosing problems.
- An easily cleanable air filter allows users to carry out a routine cleaning schedule themselves, extending the life expectancy of the ice maker.
- Includes a double-sided stainless steel evaporator, which requires fewer cycles to produce a full bin of ice, thereby reducing energy consumption.
- Cubes produced are crystal clear as only the purest water molecules will freeze on to the stainless steel evaporator.
- Cold and wet areas are insulated and separated from electrical and heat producing components. These design features improve the reliability, sanitation and reduce maintenance and service cost.

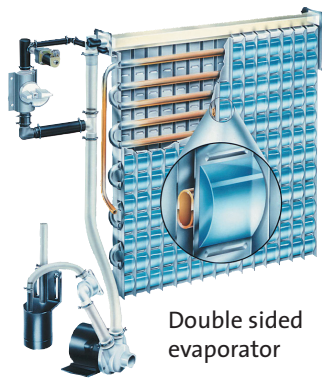

Double sided evaporator



Ice Type: Crescent  
Size: 30 x 37 x 13 mm



### Available Models

Model	Air Cooled	Water Cooled
KM-35A	•	

### Bins

Model	Type of Bin	Max. Bin Capacity
KM-35A	Self contained	16kg

### Production

Model	Ice Production per 24h (Approx.)	Temperature	Ice Production per Cycle (Approx.)	Water Consumption per 24h (Approx.)
KM-35A	36kg 32kg 25kg	AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C	0,71kg / 80pcs	0.142m <sup>3</sup> 0.060m <sup>3</sup> 0.042m <sup>3</sup>

For more information visit our website  
[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)


Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.





# HOSHIZAKI

## KM-35A CRESCENT ICE MAKER

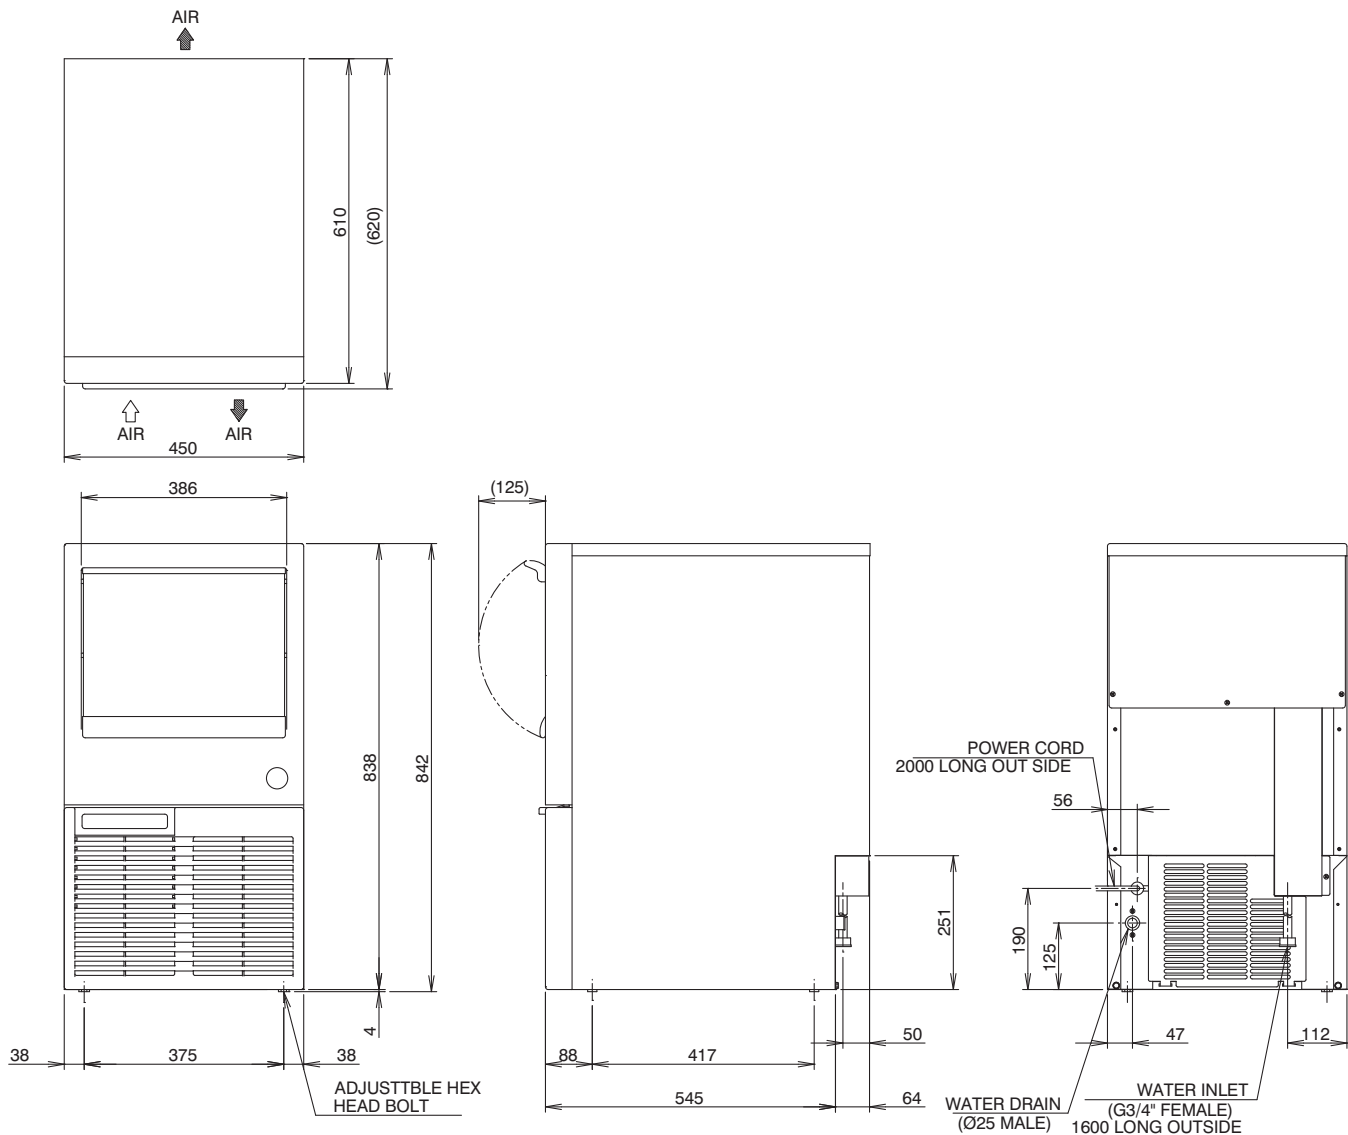

### Specifications

Specification	KM-35A
Dimensions W x D x H (mm)	450 x 610 x 842
AC Supply Voltage	1 Phase 220 - 240V / 50Hz
Electric Consumption (AT.32°C, WT.21°C)	195W
Insulation Foam Blowing Agent	Cyclopentane/CFC Free/ODP:0/GWP:3
Heat Rejection (AT.32°C, WT.21°C)	460W
Refrigerant Charge	R134a

Full CAD specification drawings available on website

Operation Requirements
Ambient Temperature: 1 - 40°C
Water Supply Temperature: 5 - 35°C
Water Supply Pressure: 0,7 - 7,8 bar (0,07 - 0,78MPa)
Voltage Range: 198 - 254V
Accessories
Instruction Manual, Scoop, Adjustable Bolt, Outlet Hose

For more information please contact your local sales office:

Hoshizaki Belgium:  
Hoshizaki Deutschland:  
Hoshizaki France:  
Hoshizaki Iberia:  
Hoshizaki Middle East:

info@hoshizaki.be  
info@hoshizaki.de  
info@hoshizaki.fr  
info@hoshizaki.es  
info@hoshizaki.ae

Hoshizaki Nederland:  
Hoshizaki United Kingdom:  
Other countries:

sales@hoshizaki.nl  
uksales@hoshizaki.co.uk  
sales@hoshizaki.nl

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)